


Xerox® AltaLink® Colour Multifunction Printer



C8030/C8035/C8045/C8055/C8070

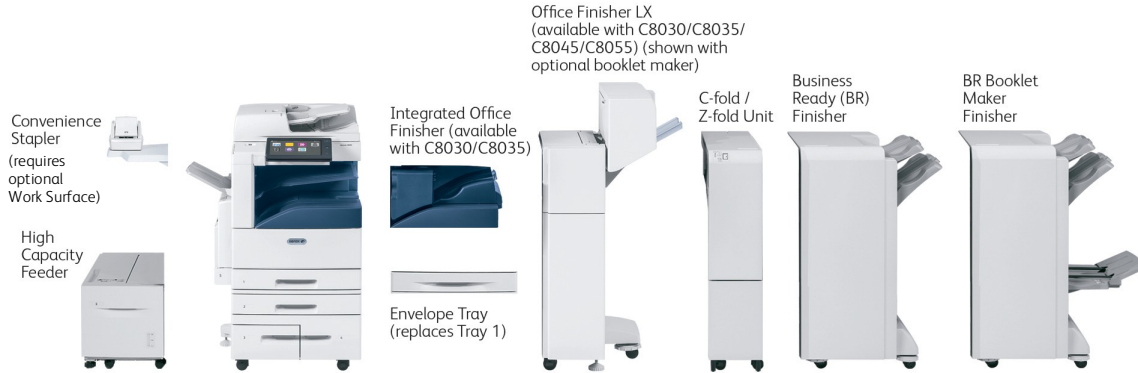

AltaLink® C8000 Series Colour Multifunction Printers are built on Xerox® ConnectKey® Technology. For more information, go to www.ConnectKey.com.

| System Specification | AltaLink® C8030 | AltaLink® C8035 | AltaLink® C8045 | AltaLink® C8055 | AltaLink® C8070 |
|-------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|
| Speed | | | | | |
| Colour / Black-and-White | Up to 30 / 30 ppm | Up to 35 / 35 ppm | Up to 45 / 45 ppm | Up to 50 / 55 ppm | Up to 70 / 70 ppm |
| Monthly Duty Cycle¹ | Up to 90,000 pages / month | Up to 110,000 pages / month | Up to 200,000 pages / month | Up to 300,000 pages / month | Up to 300,000 pages / month |
| Recommended Average Monthly Print Volume² | 5,000 to 12,000 pages | 5,000 to 15,000 pages | 8,000 to 20,000 pages | 8,000 to 22,000 pages | 10,000 to 40,000 pages |
| Hard Drive / Processor / Memory | Minimum 250 GB HDD / Intel® Atom™ Quad Core 1.91 GHz / 2 MB Cache / 8 GB system memory | | | | |
| Connectivity | Ethernet 10/100/1000 Base-T, High-speed USB 2.0 direct print, Wi-Fi Direct with optional Xerox® USB Wireless Adapter, Near Field Communication (NFC) | | | | |
| Controller Features | Unified Address Book, Remote Control Panel, Configuration Cloning, Online Support | | | | |
| Optional Controller | Xerox® EX-c C8000 Print Server Powered by Fiery® | | | | |
| Copy and Print | | | | | |
| Copy and Print Resolution | Copy: Up to 600 x 600 dpi; Print: Up to 1200 x 2400 dpi | | | | |
| First-Print-Out Time colour/black-and-white | As fast as 6.5 / 5.3 seconds | As fast as 6.4 / 5.2 seconds | As fast as 6.5 / 5.3 seconds | As fast as 6.0 / 4.7 seconds | As fast as 4.7 / 4.0 seconds |
| First-Copy-Out Time (from platen/warmed up state) | As fast as 8.1 seconds / As fast as 6.7 seconds | As fast as 8.1 seconds / As fast as 6.7 seconds | As fast as 7.8 seconds / As fast as 6.4 seconds | As fast as 7.2 seconds / As fast as 5.7 seconds | As fast as 5.2 seconds / As fast as 4.9 seconds |
| Page Description Language | Adobe® PostScript® 3™, Adobe® PDF, PCL 5c / PCL 6, optional XML Paper Specification (XPS®) | | | | |
| Print Features | Print from USB, Encrypted Secure Print, Xerox® Earth Smart Driver Settings, Job Identification, Booklet Layout, Store and Recall Driver Settings, Bi-directional Real-time Status, Scaling, Job Monitoring, Application Defaults, Two-sided Printing (as default), Hold All Jobs | | | | |
| Mobile (Optional) | | | | | |
| Mobile Printing (optional) | Xerox® Workplace Suite and Xerox® Workplace Cloud | | | | |
| Mobile Printing Connectivity | Apple® AirPrint®, Mopria® Certified, Mopria® Print Service Plug-in for Android™, @PrintByXerox, Xerox® Print Service Plug-in for Android™ | | | | |

Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

| Mobile (Optional) | | | | | |
|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|-----------------|------------------------------------------------------------------|
| Mobile Apps and Xerox App Gallery | Xerox App Gallery: Cloud Connector Apps: Print and Scan to/from: Salesforce, Google Drive®, Microsoft® OneDrive®, Microsoft Office 365™, DropBox™ and Box® Productivity Apps: Xerox® Easy Translator Service Device Management Apps: QR Code Scan Apps: Xerox® Scanning App for DocuShare® See the full list of apps available in the Xerox App Gallery at www.xerox.com/AppGallery . | | | | |
| Xerox® Workplace Suite and Xerox® Workplace Cloud | Xerox® Workplace Suite is a modular set of workflows designed to save customers time and money by providing effective control over their print fleet, while enabling worker productivity and mobility through a set of robust workflows. Xerox enables ultimate customer flexibility by offering these capabilities in both an on-premises server version (Workplace Suite) and with a cloud based-version (Workplace Cloud) of this solution. | | | | |
| Scan | | | | | |
| Standard Features | Destinations: Scan to USB / Email / Network (FTP/SMB); File Formats: PDF, PDF/A, XPS, JPEG, TIFF; Convenience Features: Scan to Home, Searchable PDF, Single/Multi-Page PDF / XPS / TIFF, Password Protected PDF, Unified Address Book, Optical Character Recognition (OCR), Scan to Folder, 1-Touch Apps, TWAIN Support | | | | |
| Optional Features | ConnectKey® for DocuShare®, other solutions available through various Xerox Business Innovation Partners at www.office.xerox.com/Software-Solutions . | | | | |
| Fax | | | | | |
| Standard Features | Internet Fax, Fax Build Job, Network Server Fax Enablement | | | | |
| Optional Features | Fax Forward to Email or SMB Share, Walk-up Fax (one-line and two-line options, includes LAN Fax) | | | | |
| Security | | | | | |
| Standard Features | McAfee® ePolicy Orchestrator Integration, HDD Overwrite, AES 256-bit Encryption (FIPS 140-2 compliant), SSL, SHA-256 Hash Message Authentication, Common Criteria Certification (ISO 15408), Encrypted Secure Print, Secure Fax, Secure Scan, Configuration Watchdog, Fleet Orchestrator, Secure Email, Network Authentication, TLS, SNMPv3, Audit Log, Access Controls, User Permissions, Cisco® Identity Services Engine (ISE) compatible | | | | |
| Optional Features | McAfee® Integrity Control, Smart Card Enablement Kit (CAC/PIV/.NET), Xerox® Integrated RFID Card Reader | | | | |
| Accounting | | | | | |
| Standard Features | Xerox® Standard Accounting (Copy, Print, Scan, Fax, Email), Network Accounting Enablement | | | | |
| Optional Features | Equitrac®, YSoft® Papercut®, other network accounting solutions available through various Xerox Business Innovation Partners | | | | |
| Device Specification | | | | | |
| Control Panel Languages | US English, International English, International French, Italian, German, International Spanish, Dutch, Brazilian Portuguese, Swedish, Norwegian, Danish, Finnish, Turkish, Greek, Russian, Czech, Polish, Hungarian, Romanian, Catalan, Arabic | | | | |
| Accessories | | | | | |
| Optional | High Capacity Feeder (HCF) Envelope Tray (Replaces Tray 1) Horizontal Transport Kit BR (Business Ready) Finisher (requires Horizontal Transport Kit) (optional with C8030, C8035, C8045, C8055, C8070) BR Booklet Maker Finisher (requires Horizontal Transport Kit) (optional with C8030, C8035, C8045, C8055, C8070) C-fold / Z-fold Unit for BR Finisher or BR Booklet Maker Finisher Convenience Stapler (requires optional Work Surface) Integrated Office Finisher (optional with C8030, C8035) Office Finisher LX (optional with C8030, C8035, C8045, C8055) Booklet Maker for Office Finisher LX Hole Punch for Office Finisher LX Smart Card Enablement Kit EFI™ Fiery® Integrated Network Server Walk Up Fax (One- or Two-line options, includes LAN Fax) Wi-Fi Direct with Optional Xerox® USB Wireless Adapter McAfee® Integrity Control Enablement Kit Keyboard Kit (Wired/USB) XPS Print Option Kit ³ Integrated RFID Card Reader Kit Foreign Device Interface | | | | |
| Foreign Device Interface (FDI) | Also known as Auxiliary Access Device, this is an interface to third-party access control devices, such as coin machines and card readers. | | | | |
| Electrical Requirements | AltaLink® C8030 | AltaLink® C8035 | AltaLink® C8045 | AltaLink® C8055 | AltaLink® C8070 |
| North America | Voltage: 110-127 VAC +/- 10% Frequency: 50/60 Hz +/- 3%, 15 A | | | | Voltage: 110-127 VAC +/- 10% Frequency: 50/60 Hz +/- 3%, 20 A |
| Europe | Voltage: 220-240 VAC +/- 10% Frequency: 50/60 Hz +/- 3%, 10 A | | | | Voltage: 220-240 VAC +/- 10% Frequency: 50/60 Hz +/- 3%, 20 A |

Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

| Power Consumption | AltaLink® C8030 | AltaLink® C8035 | AltaLink® C8045 | AltaLink® C8055 | AltaLink® C8070 |
|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Running (Average) | 115V: 653 watts 230V: 667 watts | 115V: 687 watts 230V: 699 watts | 115V: 740 watts 230V: 761 watts | 115V: 787 watts 230V: 810 watts | 115V: 942 watts 230V: 971 watts |
| Standby Mode | 115V: 63 watts 230V: 62 watts | 115V: 64 watts 230V: 61.6 watts | 115V: 71 watts 230V: 70.5 watts | 115V: 95 watts 230V: 81.5 watts | 115V: 85 watts 230V: 81.6 watts |
| Auto Off/Sleep Mode | 115V: 1.2 watts 230V: 1.6 watts (Default time to sleep mode = 2 minutes) | 115V: 1.2 watts 230V: 1.6 watts (Default time to sleep mode = 2 minutes) | 115V: 1.2 watts 230V: 1.6 watts (Default time to sleep mode = 2 minutes) | 115V: 1.2 watts 230V: 1.6 watts (Default time to sleep mode = 2 minutes) | 115V: 1.3 watts 230V: 1.9 watts (Default time to sleep mode = 2 minutes) |
| Warm-up (from Off) | As fast as 81 seconds | | | | |
| Recovery from Low Power | As fast as 2 seconds | | | | |
| Recovery from Sleep | As fast as 6.2 seconds | | | | |
| Operating Environment | | | | | |
| Required Temperature Range | 50 to 82° F / 10 to 28° C | | | | |
| Required Relative Humidity | 15% to 85% | | | | |
| Sound Power Levels | Operating: 63.9 dB(A) Standby: 3.32 dB(A) | | Operating: 68.3 dB(A) Standby: 3.35 dB(A) | | Operating: 71.3 dB(A) Standby: 3.31 dB(A) |
| Dimensions and Weight | | | | | |
| Base Configuration | Width: 25.2 in. / 640 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 321 lb. / 151.9 kg | | | | |
| With Integrated Office Finisher (C8030, C8035) | Width: 26 in. / 662.6 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 348 lb. / 158 kg | | | | |
| With Office Finisher LX (with Booklet Maker) | Width: 46.5 in. / 1,182 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 390 lb. / 177.2 kg | | | | |
| Base Configuration with Business Ready (BR) Finisher | Width: 50.3 in. / 1,277 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 430.4 lb. / 195.3 kg | | | | |
| Base Configuration with BR Booklet Maker Finisher | Width: 56.3 in. / 1,429.2 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 467.1 lb. / 212.3 kg | | | | |
| Base Configuration with BR Booklet Maker Finisher and C-fold / Z-fold Unit | Width: 65.5 in. / 1,664.2 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 581.7 lb. / 264.4 kg | | | | |
| Base Configuration with BR Booklet Maker Finisher, C-fold / Z-fold Unit and High Capacity Feeder | Width: 77.9 in. / 1,978.2 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 645.5 lb. / 293.4 kg | | | | |
| System Certification / Regulatory Compliance | | | | | |
| Certifications | To view the latest list of certifications, go to www.xerox.com/OfficeCertifications . | | | | |

Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

| Paper Handling | AltaLink® C8030 | AltaLink® C8035 | AltaLink® C8045 | AltaLink® C8055 | AltaLink® C8070 |
|---------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|-----------------|-----------------|
| Single-pass Duplex Automatic Document Feeder (DADF) | | | | | |
| Capacity⁴ | 130 sheets | | | | |
| Single-pass Duplex Automatic Document Feeder (DADF) | | | | | |
| Speed | Up to 80 pages per minute black-and-white and colour (simplex) Up to 139 images per minute (ipm) black-and-white and colour (duplex) | | | | |
| Paper Sizes Sensed | 3.4 x 4.9 in. to 11.7 x 17 in. / 85 x 125 mm to 297 x 431.8 mm | | | | |
| Weights | 16 lb. to 32 lb. bond / 60 to 128 gsm | | | | |
| Bypass Tray | | | | | |
| Capacity⁴ | 100 sheets | | | | |
| Sizes | Custom Sizes: 3.5 x 3.9 in. to 12.6 x 19 in. / 89 x 98 mm to 320 x 483 mm | | | | |
| Weights | 16 lb. bond to 110 lb. cover / 60 to 300 gsm | | | | |
| Media Types | Bond Card Stock Card Stock Reloaded Custom Envelopes Glossy Card Stock Glossy Card Stock Reloaded Heavyweight Card Stock Heavyweight Card Stock Reloaded Heavyweight Glossy Card Stock Heavyweight Glossy Card Stock Reloaded Hole Punched Labels Letterhead Lightweight Lightweight Cardstock Lightweight Card Stock Reloaded Lightweight Glossy Card Stock Lightweight Glossy Card Stock Reloaded Plain Plain-Reloaded Preprinted Recycled Transparencies | | | | |
| Trays 1 and 2 (Common to both tray configurations below) | | | | | |
| Capacity⁴ | 520 sheets each | | | | |
| Sizes | Tray 1: Custom Sizes: 5.5 x 7.2 in. to 11.7 x 17 in. / 140 x 182 mm to 297 x 432 mm short edge feed (SEF) Tray 2: Custom Sizes: 5.5 x 7.2 in. to 12 x 18 in. / 140 x 182 mm to SRA3 (SEF) | | | | |
| Weights | 16 lb. bond to 140 lb. index / 60 to 256 gsm | | | | |
| Media Types | Bond Card Stock Card Stock Reloaded Custom Envelopes Glossy Card Stock Glossy Card Stock Reloaded Heavyweight Card Stock Heavyweight Card Stock Reloaded Heavyweight Glossy Card Stock Heavyweight Glossy Card Stock Reloaded Hole Punched Labels Letterhead Lightweight Lightweight Cardstock Lightweight Card Stock Reloaded Lightweight Glossy Card Stock Lightweight Glossy Card Stock Reloaded Plain Plain-Reloaded Preprinted Recycled Transparencies | | | | |
| Four Tray Configuration (Trays 3 and 4) (Available on C8030/C8035) | | | | | |
| Capacity⁴ | Tray 3: 520 sheets Tray 4: 520 sheets | | | | |

Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

| Four Tray Configuration (Trays 3 and 4) (Available on C8030/C8035) | |
|---------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sizes | Trays 3 and 4: 5.5 x 7.2 in. to 12 x 18 in. / 140 x 182 mm to SRA3 mm (SEF) |
| Weights | 16 lb. bond to 140 lb. index / 60 to 256 gsm |
| Media Types | Bond Card Stock Card Stock Reloaded Custom Envelopes Glossy Card Stock Glossy Card Stock Reloaded Heavyweight Card Stock Heavyweight Card Stock Reloaded Heavyweight Glossy Card Stock Heavyweight Glossy Card Stock Reloaded Hole Punched Labels Letterhead Lightweight Lightweight Cardstock Lightweight Card Stock Reloaded Lightweight Glossy Card Stock Lightweight Glossy Card Stock Reloaded Plain Plain-Reloaded Preprinted Recycled Transparencies |
| High Capacity Tandem Tray (Available for all speeds) | |
| Capacity⁴ | Tray 3: 867 sheets Tray 4: 1,133 sheets |
| Sizes | 8.5 x 11 in. / A4, JIS B5, Executive (7.25 x 10.5 in) LEF |
| Weights | 16 lb. bond to 140 lb. index / 60 to 256 gsm |
| Media Types | Bond Card Stock Custom Glossy Card Stock Hole Punched Labels Letterhead Lightweight Cardstock Lightweight Glossy Card Stock Plain Preprinted |
| Envelope Tray (Optional - Replaces Tray 1) | |
| Capacity⁴ | Up to 60 envelopes |
| Sizes | #10 Commercial (9.25 x 4.125 in.) / Monarch, DL, C5 Custom Sizes: 3.9 x 5.8 in. to 6.4 x 9.5 in. / 98 x 148 mm to 162 x 241 mm |
| Weights | 20 lb. to 24 lb. bond / 75 to 90 gsm |
| High Capacity Feeder (HCF) (Optional with all models) | |
| Capacity⁴ | 2,000 sheets |
| Sizes | Standard Sizes: 8.5 x 11 in. or 7.25 x 10.5 in. / A4 or B5 LEF |
| Weights | 16 lb. bond to 140 lb. index / 55 to 256 gsm |
| Total Capacity | |
| Device Total Capacity⁴ | Four Tray Module: 2,180 sheets Four Tray Module with High Capacity Feeder: 4,180 sheets High Capacity Tandem Tray Module: 3,140 sheets High Capacity Tandem Tray Module with High Capacity Feeder: 5,140 sheets |

Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

| Finishing | AltaLink® C8030 | AltaLink® C8035 | AltaLink® C8045 | AltaLink® C8055 | AltaLink® C8070 |
|----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|-----------------|-----------------|
| Dual Offset Catch Tray (Replaced by Integrated Finisher. Becomes Single Catch Tray with Office Finisher and Business Ready Finishers) | | | | | |
| Stacking Tray Capacity⁴ | Dual Offset Catch Tray: Up to 250 sheets each Left Side Face up Tray: Up to 100 sheets | | | | |
| Integrated Office Finisher (Optional with C8030/C8035) | | | | | |
| Stacking Tray | 500 sheets of 20 lb. bond / 80 gsm – 8.5 x 11 in. / A4 or 250 sheets of 20 lb. bond / 80 gsm – 11 x 17 in. / A3 | | | | |
| Sizes | 3.5 x 3.9 in. to 11.7 x 17 in. / 89 x 98 mm to 297 x 432 mm | | | | |
| Weights | 16 lb. bond to 80 lb. cover / 60 to 256 gsm | | | | |
| Stapling | Single Auto-Stapling: 50 sheets maximum: Letter / A4 / B5 size sheets (less than 90 gsm or (2) 220 gsm covers) 30 sheets maximum: Legal / Tabloid / A3 / B4 size sheets (less than 90 gsm or (2) 220 gsm covers) | | | | |
| Office Finisher LX (Optional with C8030/C8035/C8045/C8055) (Horizontal Transport Module included) | | | | | |
| Stacking Tray Capacity⁴ | 2,000 sheets unstapled or 1,000 sheets single stapled or 750 sheets dual stapled (8.5 x 11 in. / A4) | | | | |
| Stacking Tray Sizes | 8.3 x 7.2 in. to 11.7 x 17 in. / 210 x 182 mm to 297 x 432 mm | | | | |
| Weights | 16 lb. bond to 80 lb. cover / 60 to 256 gsm | | | | |
| Multiposition Stapling | 50 sheets of 24 lb. bond / 90 gsm | | | | |
| Hole Punch (Optional) | North America Europe | | | | |
| | 2-3-hole punch 2-4-hole punch | | | | |
| Booklet Maker for Office Finisher LX (Score/Crease, Saddle-stitch Staple) (Optional) | | | | | |
| Top Tray Capacity⁴ | 40 booklets (2-15 sheets per booklet – 20 lb. / 80 gsm or less) | | | | |
| Sizes | Letter – 8.5 x 11 in. / A4 SEF Legal – 8.5 x 14 in. / B4 SEF Ledger – 11 x 17 in. / A3 SEF | | | | |
| Saddle-Stitch Stapling | 2-15 sheets / 8-60 page booklet 16 lb. to 24 lb. bond / 60 x 90 gsm | | | | |
| Score / Crease | 1-15 sheets / unstapled | | | | |
| Optional Business Ready (BR) Finisher (Requires Horizontal Transport Kit) | | | | | |
| Capacity⁴ | Offsetting Top Tray: 500 sheets Stacking Stapling Tray: 3,000 sheets unstapled or 100 sets (dual or 4-position stapling) 11 x 17 in., 8.5 x 14 in. / A3 or 200 sets (single-position staple) 8.5 x 11 in. / A4 | | | | |
| Sizes | 7.25 x 10.5 in. to 12 x 19 in. / B5 to A3 for stacking 7.25 x 10.5 in. to 11 x 17 in. / B5 to A3 for stapling | | | | |
| Weights | 16 lb. bond to 110 lb. cover / 60 to 300 gsm (coated and uncoated) | | | | |
| Stapling | Single and multiposition stapling Auto stapling (50 sheets maximum) – 24 lb. / 90 gsm Letter, Legal, Tabloid, A3, A4, B4 and B5 sizes supported | | | | |
| Hole Punch | North America Europe | | | | |
| | 2-3-hole punch 2-4-hole punch 4-hole “Swedish” punch (optional) | | | | |
| Optional BR Booklet Maker Finisher (Requires Horizontal Transport Kit) | | | | | |
| Capacity⁴ | Offsetting Top Tray: 500 sheets of 8.5 x 11 in. / A4 unstapled Stacking Stapling Tray: 1,500 sheets of 8.5 x 11 in. / 11 x 17 in. / A4 / A3 unstapled or 200 stapled sets of 8.5 x 11 in. / A4 (single-position stapling or dual or 4-position stapling) or 100 stapled sets of 11 x 17 in. / A3 | | | | |
| Sizes | 4 x 6 in. to 11 x 17 in. / A6 to A3 for stacking 7.25 x 10.5 in. to 11 x 17 in. / B5 to A3 for stapling | | | | |
| Weights | 16 lb. bond to 110 lb. cover / 60 to 300 gsm (coated and uncoated) | | | | |
| Stapling | Single and multiposition stapling Auto stapling (50 sheets maximum) – 24 lb. / 90 gsm Letter, Legal, Tabloid, A3, A4, B4 and B5 sizes supported | | | | |
| Hole Punch | North America Europe | | | | |
| | 2-3-hole punch 2-4-hole punch 4-hole “Swedish” punch (optional) | | | | |

Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

| Optional BR Booklet Maker Finisher (Requires Horizontal Transport Kit) | | | | | |
|--------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|
| Booklet Maker | Saddle-stitch 2 to 16 sheets (7 sheets at 106 to 176 gsm coated or 5 sheets at 177 to 220 gsm coated) Bi-fold up to 5 sheets Letter, Legal, Tabloid, A3, A4 supported | | | | |
| C-fold / Z-fold Unit (Optional with BR Finisher and BR Booklet Maker Finisher) | | | | | |
| Types | C-fold, Z-fold and Z-half-fold | | | | |
| Capacity⁴ | 40 sheets | | | | |
| Sizes | C-fold and Z-fold: Letter – 8.5 x 11 in. / A4 SEF only Z-half-fold: Tabloid – 11 x 17 in. / A3 only | | | | |
| Weights | 16 lb. to 24 lb. bond / 64 to 90 gsm | | | | |
| Output Trays | Envelope Tray: C-fold, Z-fold and Tri-fold Stacker Tray or Top Tray: Z-half-fold | | | | |
| Convenience Stapler (Requires Optional Work Surface) | | | | | |
| Capacity⁴ | 50-sheet stapling 5,000 staples Requires separate power outlet | | | | |
| Copy | AltaLink® C8030 | AltaLink® C8035 | AltaLink® C8045 | AltaLink® C8055 | AltaLink® C8070 |
| First-Copy-Out Time (from platen/warmed up Colour / Black-and-White) | As fast as 8.1 seconds / As fast as 6.7 seconds | As fast 8.1 seconds / As fast as 6.7 seconds | As fast as 7.8 seconds / As fast as 6.4 seconds | As fast as 7.2 seconds / As fast as 5.7 seconds | As fast as 5.2 seconds / As fast as 4.9 seconds |
| Sides (input:output) | 1-1, 1-2, 2-2, 2-1 | | | | |
| Quantity | 1 to 9,999 | | | | |
| Resolution (max) | Up to 600 x 600 dpi | | | | |
| Reduction / Enlargement | Variable zoom from 25% to 400% in 1% increments | | | | |
| Concurrency | Program-ahead to allow job to be initiated while initial job is processed (Copy, Print, Fax and Scan) | | | | |
| Copy Features | Annotation and Bates™ stamping (with colour capability and font size adjustment) Authentication for Services (i.e., Colour Copy) Auto Paper Select Auto Reduction & Enlargement (To fit selected paper size) Auto Tray Switching Automatic 2-sided / Duplex Booklet Creation Build Job (Enables page-level programming and also lets you proof each section or delete last section as the job is built) Collation Covers (Front only, front and back, back only, printed inside and out: Blank or Printed) Dividers (blank) Edge Erase Features Help (Intuitive text and graphic descriptions) ID Card Copy Image Quality Adjustments Image Shift (with Auto Center option) Invert Image (negative or mirror image) Large Job Interrupt Multi-up (up to 15 columns by 15 rows) Sample Set Save Job Settings Single Colour Stapling Transparencies | | | | |
| Xerox® Copier Assistant® | Xerox® Copier Assistant® Software provides a PC-based alternative to the user interface touchscreen. Used in conjunction with a customer-supplied PC attached via the USB port, this software supports text-to-speech, screen magnification and easy PC keyboard access to basic and advanced copy features. Section 508-compliant. For more information or to download Xerox® Copier Assistant for free, visit www.xerox.com . | | | | |

Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

| Print | AltaLink® C8030 | AltaLink® C8035 | AltaLink® C8045 | AltaLink® C8055 | AltaLink® C8070 |
|-------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|-----------------|-----------------|
| Resolution | Up to 1200 x 2400 dpi | | | | |
| Print Features | <p>Application Defaults Banner Sheet Enable / Disable Custom Colour Options (Colour By Words) Bi-directional Real-time Status Cover Selection Delay Print (specific time) User Permissions Image Options (Toner Saver, Resolution (Standard, Enhanced, High)) Job Identification (Print ID or Banner, Print ID in margins on first page only or all pages) LAN Fax (requires optional Fax Kit) Layout / Watermark N-up (up to 16 pages per sheet) Booklet Layout Finishing Fit to New Paper Size Hold All Jobs Paper Selection by Attribute Sample Set Saved Job (colour jobs can be printed as monochrome) Secure Print with Timed Deletion Special Pages (exception page programming: covers, inserts, exception pages) Store and Recall Driver Settings Sustainability Features (Xerox® Earth Smart Settings, Duplex, N-up, Turn-off Banner and Print ID, Smart Sample Set, Hold All Jobs) Two-sided Printing (as default)</p> | | | | |
| Print from USB | <p>Allows walk-up printing from Type A USB port on front panel Supports direct printing from computer via Type B USB port Supported file formats: PDF, JPEG, TIFF, PS, XPS, PCL Colour jobs can be printed as black-and-white</p> | | | | |
| Operating Systems | <p>Windows Server 2008 SP2 (32- and 64-bit) Windows Server 2008 R2 (64-bit) Windows Server 2012 and R2 (64-bit) Windows Server 2016 (64-bit) Windows Server 2019 (64-bit) Windows 7 (32- and 64-bit) Windows 8 (32- and 64-bit) Windows 8.1 (32- and 64-bit) Windows 10 (32- and 64-bit) Mac OS 10.12, 10.13, 10.14 Fedora® Core Ubuntu®</p> | | | | |
| Network Protocols | <p>TCP/IP: HTTP/HTTPS, Internet Printing Protocol, LPR/LPD, Raw Socket Printing/Port 9100, IPv4/IPv6, WSD Microsoft Windows Networking over IP Bonjour® / AirPrint® IPv6 Secure FTP Most protocols not in use can be disabled</p> | | | | |
| Administrative Protocols | DHCP, BOOTP, SNMP, SLP® v2, HTTP, HTTPS, DHCP Autonet, TLS, NTP, DNS, SMB, SMTP/POP3, WSD, LDAP, Multicast DNS | | | | |
| Font Capability | PCL: 93 scalable fonts, line printer and bitmap font (including Cyrillic font support) PostScript 3: 173 Type 1 fonts, 2 Multiple Master fonts | | | | |
| Xerox® Mobile Express Driver® | Makes it easy for mobile users to find, use and manage Xerox® and non-Xerox® devices in every new location. Plug into a new network, and Mobile Express Driver automatically discovers available printers and provides status and capability information. Save a list of "favourite" printers for each location, store application print settings for use on any printer in any network, and greatly reduce mobile support calls to IT. | | | | |
| Xerox® Global Print Driver® | A truly universal print driver that lets IT administrators install, upgrade and manage Xerox® and non-Xerox® devices from a single driver. It provides a consistent, easy-to-use interface for end-users, reducing the number of support calls and simplifying print services management. | | | | |
| Xerox® Pull Print Driver | Makes it easy for IT managers to qualify, deploy and manage all print devices using a single driver in a Pull Print environment. Uses a single queue and single driver. The Xerox® Pull Print Driver extends convenience across a broad range of printing assets. IT administrators no longer need to manage and configure multiple drivers. Used in conjunction with Equitrac Office®, Ysoft® SafeQ®, Pharos® and others. | | | | |
| Unified Address Book for Fax, Internet Fax, Email and Scan to... | | | | | |
| Features | <p>Services supported: Fax, Internet Fax, Email, Scan to Maximum contacts: 5,000 Contacts: Supports 1 or more destinations Favorites for quick access of all services supported</p> | | | | |

Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

| Scan | AltaLink® C8030 | AltaLink® C8035 | AltaLink® C8045 | AltaLink® C8055 | AltaLink® C8070 |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|-----------------|-----------------|
| Concurrency | Scan while the system is printing, copying, or while it is transferring scan to network or fax jobs (priority is for return of scanned originals and printing concurrent jobs) | | | | |
| Input Speed | Up to 80 page per minute black-and-white and colour (simplex) Up to 139 images per minute (ipm) black-and-white and colour (duplex) | | | | |
| Resolution | 72 x 72 dpi to 600 x 600 dpi | | | | |
| Bit Depth | 1-bit (black-and-white), 8-bit (greyscale), 24-bit (colour) | | | | |
| Maximum Scan Area | 11 x 17 in. / A3 | | | | |
| Scan Template Management | Support 250 scan templates Create Xerox® CentreWare® IS scan templates and share via device cloning to other multifunction printers' confirmation sheet options | | | | |
| Network Protocols | sFTP, FTP, SMB, HTTP, HTTPS | | | | |
| File Compression | Colour TIFF (TIFF 6.0 or TTN2 with JPEG, LZW) Black-and-white TIFF (G3MH, G4 MMR compression - single or multiple pages) Searchable PDF/OCR and PDF/A-1b (MRC, JPEG, G3 MH, G4 MMR, JBIG 2 Huffman, JBIG Arithmetic Compression, Deflate (for Black-and-white and within MRC)) Linearised PDF / PDF/A | | | | |
| Document Management Fields (Metadata) | Features only available in Network Scan to File Templates: <ul style="list-style-type: none"> • 1 to 6 user programmable metadata fields per network scan to file templates and unlimited fields within the template – Metadata field consists of field name, default value and other configurations • Customised fields viewed on user interface for variable data input | | | | |
| Scan Features | Mixed Size Originals Scan Build Job Compression Quality/File Size Control Original Type (Photo and Text, Photo, Text, Map, Newspaper / Magazine) Auto Background and Shadow Suppression Size for Size (for mixed size originals) TWAIN Support / WIA 2.0 Support Bound Originals Edge Erase Reduction/Enlargement Single Touch Scan buttons (up to 10) | | | | |
| Scan to Email (Standard) | | | | | |
| Scan Features | <ul style="list-style-type: none"> • Email signatures (6 lines each of 128 character max), email message body (user configurable), email CentreWare IS confirmation sheet options • Scan to Email S/MIME Encryption • Email signing (requires Smart Card option) • Auto send to self | | | | |
| Directory Access | Address list via LDAP (Windows Active Directory, Exchange, Notes, Domino) Device Address Book | | | | |
| Scan to... (Standard) | | | | | |
| Features | Scan to USB Scan to Network Folder (uses Unified Address Book entries) Scan to Home Scan to Network Scan to Email Scan to PC/Server Client (SMB or FTP) Scan to Mailbox Scan to Secure FTP and HTTPS | | | | |
| Workflow Scanning (Optional) | | | | | |
| Scanning Software | Autostore v7 eCopy ShareScan v5.2 eCopy ScanStation v5.2 | | | | |
| Scanning Apps and Xerox App Gallery | Scan to/from: Dropbox™, Google Drive™, Microsoft® OneDrive®, Microsoft Office 365™ and Box® See the full list of apps available in the Xerox App Gallery: www.xerox.com/AppGallery . | | | | |

Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

| Security | AltaLink® C8030 | AltaLink® C8035 | AltaLink® C8045 | AltaLink® C8055 | AltaLink® C8070 |
|---------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|-----------------|-----------------|
| Features | <ul style="list-style-type: none"> Expanded Authentication <ul style="list-style-type: none"> Network authentication to access device and/or device services via Kerberos (UNIX / Windows Server 2008), SMB (Windows Server 2008, Windows server 2012), NDS, LDAP authentication Local Authentication (internal database) Smart Card authentication - 144k CAC / PIV Card Support (2048 bit certificate key) / .NET Secure Data Digitally signed PDF (when using Smart Card authentication) Encrypted and authentication to SMTP server for Scan to Email Encrypted / Password Protected PDF (when using Email and Network Scan Templates only) Secure Print (up to 10 digit PIN or Network Authentication) Immediate Image Overwrite / Securely delete jobs using approved algorithms On Demand Image Overwrite (Scheduled, Manual), includes sanitation of unused area of disk FIPS 140-2 256 bit Hard Disk Encryption, TLS, IPPS, HTTPS, SFTP, SNMPv3 Expanded Authorization <ul style="list-style-type: none"> SA access based on network credentials Authorization per user per service User Permissions required to access Print and Print Features (e.g. colour access, or time restrictions) reflects in the print driver Secure Network Access Configuration Watchdog (Monitor and remediate 8 security settings): <ul style="list-style-type: none"> Scan to USB Enable / Disable Print from USB Enable / Disable Front USB Port Enable / Disable Audit Log Enable / Disable User Data Encryption Enable / Disable Immediate Job Overwrite Enable / Disable Scheduled Image Overwrite Enable / Disable McAfee® Embedded Control Enable / Disable IP Filter, IPsec, IPv6, TLS v1.0, v1.2, SNMPv3, HTTPS, 802.1X, SFTP McAfee® Embedded Control (whitelisting), McAfee® Integrity Control (optional), Port disablement including USB ports, Audit Log, Hide Print Job Names Cisco® Identity Services Engine (ISE) compatible Full system Common Criteria certified by NIAP under HD Protection Profile for Hardcopy Devices v1.0 (HCD-PP v1.0) | | | | |
| Xerox® Integrated RFID Card Reader E1.0 (Optional kit) | Integrated support for most industry security cards providing additional security; with embedded multifunction printer card readers in the multifunction printer panel. | | | | |
| Fax | AltaLink® C8030 | AltaLink® C8035 | AltaLink® C8045 | AltaLink® C8055 | AltaLink® C8070 |
| Network Server Fax Features | | | | | |
| Compatibility | ITU (CCITT) group 3; Various Xerox Business Innovation Partner Solutions | | | | |
| Maximum Scan Area | 11 x 17 in. / A3 | | | | |
| Fax Send Features | One- or Two-sided Scanning (up to 11 x 17 in. / A3) Add to Send List (200 numbers maximum) Build Job, Favorites, Delay Send (specific time) Original Type (photo, text or photo and text) | | | | |
| Fax Print Features | One- or Two-sided Printing, Staple, Secure Print | | | | |
| Transmission Resolution | Superfine: 400 x 200 dpi (Scan at 600 x 600 dpi) Fine: 200 x 200 dpi Standard: 200 x 100 dpi | | | | |
| Internet Fax Features | | | | | |
| Compatibility | Direct print-ready document transmission to remote Internet Fax machines or email clients (SMTP) Reception and automatic printout of documents sent via email from remote Internet Fax machines or email clients | | | | |
| Directory Access | Utilises the Unified Address Book | | | | |
| Send / Receive | Send: Multi-page TIFF, PDF, PDF/A Receive: TIFF, MTIFF, PDF, PDF/A, PS, text, PCL, PRN, JPEG | | | | |
| Resolution | 72 x 72 dpi to 600 x 600 dpi Bit Depth: 1-bit (black-and-white) | | | | |
| Network Protocols | SMTP (send), POP3 (receive) | | | | |
| Compliance | ITU-T T.37 compliant | | | | |
| Walk-up Fax Features (Customer-installable) – 1 and 2 lines) | | | | | |
| Compatibility | ITU (CCITT) Group 3 | | | | |
| Speed / Modems | One or Two V.34 modems: 33,600 bps. Less than 4 seconds per page transmission time ATA analog terminal adapter utilising T38 (optional) | | | | |
| Compression / Speed | MH/G3, MR/G3, MMR/SG3, JBIG/SG3 | | | | |
| Resolution | Walkup Send: Standard: 200 x 100 dpi Fine: 200 x 200 dpi Superfine: 600 x 600 dpi Receive: Accepts all sizes | | | | |

Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

| Walk-up Fax Features (Customer-installable – 1 and 2 lines) | |
|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fax Send Features | LAN Fax (fax from print driver) Auto Fax Transmission Reduction Page-by-page Job Status at the Machine Delay Start, Build Job, Favorites Automatic Memory Resend Automatic Cover Sheets PSTN Fax Batch Send (up to memory capacity) Device Address Book (up to 5,000 contacts) |
| Fax Receive Features | One- or Two-sided Printing Stapled or Unstapled Receive Print Mode – Manual (size, margin, stock, header) / Auto Output Tray Selection Up to 200 Password Protected Mailboxes Secure Receive Receive Timestamp Auto Answer Delay |
| Fax Forward | Forward to Email or SMB Location Fax Forward on Receive Only |
| Fax Reports | Activity, Dial Directory, Group Directory, Transmission Confirmation, Pending Fax, Options Report, On Demand Overwrite Report, Mailbox Report, Broadcast Report |
| Directory Access | Utilises the Unified Address Book Group fax available |
| Auto Redial | Up to 14 attempts (per country requirements) 1 to 25 minute intervals |
| Auto Resend | Up to 5 attempts |
| Device Management | |
| Management Support | SNMP Version 1, SNMP Version 2c and SNMP Version 3 trap over TCP/IP and IP MIB access (IETF-MIBII RFC 1213) Host Resources MIB RFC 2790, Printer MIB RFC 3805, PWG-Imaging-System- Power MIB, Fleet Orchestrator, Configuration Watchdog |
| Xerox® CentreWare® Web | A Web-based server application for network administrators that permits Web browser-based device management from any workstation, whether running Windows, UNIX or any other operating system: <ul style="list-style-type: none"> • Works with any SNMP-managed printer from any manufacturer. • Provides help with device discovery and installation, health checks and troubleshooting, and device upgrades, as well as basic accounting and asset management. • Requires Windows 7 and Internet Explorer 6.0 and higher. • Auto-detect Xerox® CentreWare® Web server and download configurations files for touchless remote install. |
| Xerox® Device Manager | Xerox® Device Manager collects and manages the data that drives fact-based decisions for your enterprise device management environment. It is a single tool to install print queues and configure, manage, monitor and report on both networked and locally connected devices – regardless of vendor – across your enterprise. Xerox® Device Manager provides: <ul style="list-style-type: none"> • Device monitoring and troubleshooting • Extensive reporting and discovery of new devices • Usage collection, chargeback and billing capabilities • Auto-detect Xerox® Device Manager server and download configurations files for touchless remote install |
| Fleet Orchestrator | Fleet Orchestrator feature offers the ability to create a group of devices that share information with each other via a secure peer-to-peer connection. The following data can be shared: Software update files, clone files, and 1-Touch App files. |
| Novell NDPS/NEPS | Server gateway application: centralized management tool. |
| Xerox® Device Types for SAP Environment | Xerox, together with SAP through our Gold-level membership in the SAP Printer Vendor Program, provides seamless connectivity between SAP systems and your Xerox® printers and multifunction printers. As an SAP customer you benefit from having SAP-certified Xerox® device types available right from SAP's online delivery model. SAP-certified device types for Xerox® printers and multifunction printers are available to download. www.office.xerox.com/Software-Solutions |
| Xerox® Device Types for SAP R/3 Intelligent Barcode Utility (optional) | Provides built-in process intelligence that allows the printing of barcodes on any appropriately configured PostScript printer in specific versions of SAP environment and within Latin-1 (ISO8859-1) SAP system code pages only. Used in conjunction with Xerox® PostScript Device Types for SAP environment and Xerox® Font Center Barcode Fonts. Information available at www.office.xerox.com/Software-Solutions |
| Xerox® Barcode Pro PS (optional) | Enables intelligent PostScript printing on Xerox® multifunction printers by storing Xerox® software, as well as the barcode fonts on the printer hard disk. Enables the printing of barcodes from any application (SAP client or mainframe) that supports PostScript printing. Information available at www.office.xerox.com/Software-Solutions |
| Xerox® Embedded Web Server – Integrated Device Web Pages Provided by the Device | |
| Device Status | Web server embedded in Network Controller: <ul style="list-style-type: none"> • Tray status/contents • Consumables status • Alerts Remote Control Panel |
| Job Submission | Print-ready files: PS, PCL, TIFF, PDF, JPG, XPS, TXT, PRN Output feature selection (2-sided, output colour, collate, orientation, staple, hole punch, folding, output destination) Delivery options (Immediate, sample set, delay and secure, Save job or reprint) |
| Device Administration | Allows simple, remote installation setting of configuration options and management of the device |

Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

| Xerox® Embedded Web Server – Integrated Device Web Pages Provided by the Device | |
|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Browsers | Internet Explorer 10.x, 11.x Safari 10.x, 11.x Mozilla Firefox 45.x through 53.x Opera 25.x through 53.x Chrome 48.x through 72.x |
| Support | Install print / scan drivers and online support available via web page |
| Languages Supported | International English, International French, Italian, German, International Spanish, Dutch, Brazilian Portuguese, Swedish, Norwegian, Danish, Finnish, Russian, Simplified Chinese, Korean, Japanese, Arabic |
| Remote Services | |
| Xerox® Automatic Meter Readings (AMR) | Automates the process of collecting and submitting meter reads for tracking and billing of Xerox® device usage. Eliminates the need for time-consuming end-user involvement and ensures that meter reads are submitted to Xerox on time. |
| Xerox® Automatic Supplies Replenishment (ASR) | Automatically orders supplies for Xerox® output devices based on actual usage, eliminating the need to manually manage supplies inventory. |
| Accounting | |
| Xerox® Standard Accounting (Standard) | |
| Tracking | Copy, Print, Fax, Scan and Email usage |
| Accounting | Up to 2,497 User Accounts (User ID) Up to 500 General Accounts (Client) Up to 498 Group accounts (Department) |
| Features | <ul style="list-style-type: none"> Administrator can manage the feature via the Web User Interface or device control panel in tools. Administrator has the ability to import or export user accounts, Group Accounts, General Accounts and User limits via an industry standard CSV file. |
| Accounting Options – Network Accounting Enablement (Allows central server to manage all accounting) | |
| | <ul style="list-style-type: none"> Enhanced network accounting with up-to-the-minute data on how the system is being used Comprehensive management and enterprise scale tracking and reporting of device usage of copy, print, scan and server fax Numerous solutions are available through Xerox Alliance Partners. For details visit www.xerox.com Security enhancements with the addition of HTTPS protocol support Device requests account authentication from third party server enabling larger databases of users and accounts Accept Authentication Login at control panel and pass to third party Networking Account Interface with third party accounting terminal for accounting user interface |
| EFI™ Fiery® Integrated Network Server (Optional) | |
| Processor | AMD® GX-424CC processor, 2.4 GHz, Quad-Core, 2M cache |
| Memory (ESS) | 2 GB |
| System Disk | 500 GB HDD |
| Page Description Language | PostScript v 3020 |
| Features | Fiery Command WorkStation capability via a PC or MAC (customer to provide) with Queue Management Job Preview Job Merge Change Job Properties PANTONE® Colour Tables Expert Colour Settings: Profile, Rendering and Simulation Fiery FreeForm – Variable Data capabilities Booklet Maker – booklet wizard to create booklets Print from USB flash drive Secure Erase EFI PrintMe Fiery® VUE Calibration Secure Printing User Authentication Drag and Drop job Management with CWS Importing Jobs |
| Connectivity | 10Base-T/100Base-TX/1000Base-T Ethernet |
| Optional | Fiery Options Bundle (Spot On, Auto Trapping, Hot Folders, Virtual Printers) Network Switch to connect both printer and Fiery Server to Network |

Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

| Supplies | Description | Quantity | Part Number |
|---------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|----------------------|-------------|
| Supplies | | | |
| Toner Cartridge (Metered) ⁵ | Black | 26,000 pages | 006R01509 |
| | Cyan | 15,000 pages | 006R01512 |
| | Magenta | 15,000 pages | 006R01511 |
| | Yellow | 15,000 pages | 006R01510 |
| Toner Cartridge (Sold) ⁵ | Black | 26,000 pages | 006R01701 |
| | Cyan | 15,000 pages | 006R01702 |
| | Magenta | 15,000 pages | 006R01703 |
| | Yellow | 15,000 pages | 006R01704 |
| Transfer Belt Cleaner | 1 Assembly | 160,000 pages | 001R00613 |
| Second Bias Transfer Roll | 1 Assembly | 200,000 pages | 008R13064 |
| Staple Cartridges | For BR Finisher, Integrated Office Finisher, Office Finisher LX and Convenience Stapler (1 cartridge per carton) | 5,000 each cartridge | 008R12964 |
| | For BR Booklet Maker (1 cartridge per carton) | 5,000 each cartridge | 008R13177 |
| | For Office Finisher LX Booklet Maker (8 cartridges per carton) | 2,000 each cartridge | 008R12897 |
| Staple Refills | For Integrated Office Finisher, Office Finisher LX, BR Finisher and Convenience Stapler (3 refills per carton) | 5,000 each refill | 008R12941 |
| Xerox® Smart Kit® | | | |
| Drum Cartridge ⁶ | 1 Cartridge per Colour | 125,000 | 013R00662 |
| Waste Toner Container with Suction Filter ⁷ | 1 Cartridge | 43,000 | 008R13061 |

¹ Maximum volume capacity expected in any one month. Not expected to be sustained on a regular basis.

² Expected regular monthly throughput.

³ XPS option is required to print XPS files.

⁴ Paper capacities are based on 20 lb. / 75 gsm stock; capacities will vary with different weight stocks.

⁵ Assumptions: Toner cartridge yield is based on 5% area coverage on 8.5 x 11 in. / A4 LEF. Toner yield can vary due to many factors, including but not limited to, image area coverage, image content, media size, run mode, application types, monthly print volumes and image quality set-points.

⁶ Average drum yield is based on a run length of 5 pages of 8.5 x 11 in. / A4 LEF pages, with split of 30% colour / 70% black-and-white pages.

⁷ Waste Toner Container yield will vary depending on type of image, area coverage % and Job run length.

Return spent imaging supplies through the Xerox Green World Alliance collection/reuse/recycling programme. For more information, visit www.xerox.com/About-Xerox/Recycling.

For more information, visit us at www.xerox.com/Office.

