





- The BDFN-x is C.P. Bourg's most compact high-speed booklet maker. A cost optimized solution depending on the In-Line application. Upgradable via kits, this is an affordable In-Line booklet making unit that may evolve as your business grows. The paper flow follows a stitch-fold-trim process with guaranteed set integrity and a maximum speed of 4,200 booklets per hour.

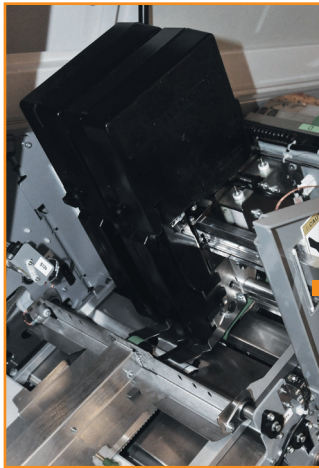

FEATURES	ADVANTAGES	BENEFITS
Large Paper Range	Maximum media size 520 x 356 mm (20.47 x 14.02 in) Minimum media size 203 x 120 mm (7.99 x 7.01 in)	Offers a wide range of booklet formats
Connectable to	iGen, ColorPress, Nuvera, DocuTech families BSF-x compatible	A superior digital In-Line booklet making solution
Push Button Interface	No manual adjustments needed	Fully automated
Folds up to 88 page Booklets	Stitch fold trim up to 22 sheets	Able to process jobs with more content
Stitch Fold Trim	Automatic stitch head adjustment Self-adjusting trimming to book thickness	Automatic top, corner, side, or saddle stitching
2 to 4 Stitch Heads (optional)	Hohner or ISP heads Hohner can accommodate a loop kit (optional)	Large range of stitching possibilities
ISP Head Features	Toolless cassette replacement	Plug & Play stitch heads
Face Trimmer	With blower and waste bin	Fully automated trimming



BDFN-x

IN-LINE

TECHNICAL SPECIFICATIONS


POPULAR CONFIGURATIONS



Printer + BCME-x + BDFN-x

Category	Booklet Maker
Model	BDFN-x
Media/Sheet Sizes	
Input Sheet Size (saddle stitching)	(In Track) x (Cross Track)
Min	203.2 x 120 mm (8 x 4.72 in)
Max	520 x 356 mm (20.47 x 14.01 in)
Output Booklet Size (saddle stitching)	(In Track) x (Cross Track)
Min	76 x 120 mm (2.99 x 4.72 in)
Max	260 x 356 mm (10.23 x 14.01 in)
Fore-Edge Max Trimming	25 mm (0.98 in)
Input/Output Sheet Size (top/side stitching)	(In Track) x (Cross Track)
Min	160 x 120 mm (6.3 x 4.72 in)
Max	297 x 356 mm (11.69 x 14.01 in)
Media/Sheet Weights	
Min	60 gsm
Max	300 gsm
Maximum Speed	4200 sets/h
Maximum Page per Saddle Stitched Booklet	22 pages (90 gsm)
Power Supply	120 V ±10% – 60 Hz – 10 A
	230 V ±10% – 50 Hz – 7 A
Power Consumption	
Operational Mode	750 W
Radiant Heat (OM)	2560 BTU/h
Standby Mode	170 W
Radiant Heat (SM)	580 BTU/h
Sound Level	70 dB
Dimensions	
Length	1.58 m (5.19 ft)
Width	0.61 m (2.00 ft)
Height	1.54 m (5 ft)
Delivery Conveyor	0.90 m (2.95 ft)
Weight	450 kg (992.08 lbs)

DIMENSIONS

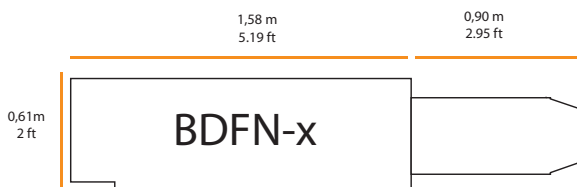

MEDIA / SHEET SIZES

