


Xerox[®] VersaLink[®] C7020/C7025/C7030 Colour Multifunction Printer

VersaLink C7000 Series Colour Multifunction Printers are built on Xerox[®] ConnectKey[®] Technology. For more information, go to www.connectkey.com.

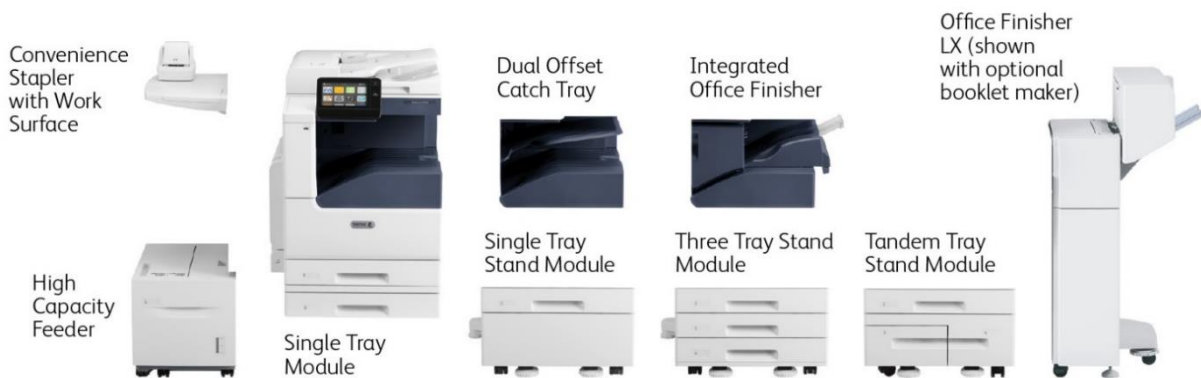

System Specifications	VersaLink C7020	VersaLink C7025	VersaLink C7030
One-Sided Speed 8.5 x 11 in. / A4 / 210 x 297 mm 8.5 x 14 in. / 216 x 356 mm 11 x 17 in. / A3 / 297 x 420 mm	Up to 20 ppm (pages per minute) long edge feed (LEF) Up to 16 ppm Up to 11 ppm	Up to 25 ppm LEF Up to 19 ppm Up to 14 ppm	Up to 30 ppm LEF Up to 23 ppm Up to 17 ppm
Two-Sided Speed 8.5 x 11 in. / A4 / 210 x 297 mm 8.5 x 14 in. / 216 x 356 mm 11 x 17 in. / A3 / 297 x 420 mm	Up to 16 ppm LEF Up to 9 ppm Up to 8 ppm	Up to 19 ppm LEF Up to 10 ppm Up to 9 ppm	Up to 23 ppm LEF Up to 12 ppm Up to 11 ppm
Monthly Duty Cycle¹	Up to 87,000 pages / month ¹	Up to 107,000 pages / month ¹	Up to 129,000 pages / month ¹
Recommended Average Monthly Print Volume²	Up to 5,500 pages	Up to 6,250 pages	Up to 7,000 pages
Hard Drive	320 GB HDD (Optional)		
Processor	1.05 GHz Dual-Core		
Memory	4 GB		
Connectivity	Ethernet 10/100/1000 Base-T, High-speed USB 3.0, Wi-Fi 802.11n/g/b/a and Wi-Fi Direct with optional Wi-Fi Kit (concurrent wired and wireless connections supported), NFC Tap-to-Pair		
Controller Features	Unified Address Book, Configuration Cloning, Scan Preview, Xerox Extensible Interface Platform [®] , Xerox App Gallery, Xerox [®] Standard Accounting, Network Accounting Enabled, Role Based Permissions, Convenience Authentication Enabled, Online Support (accessed from the user interface and print driver)		
User Interface Languages	English, French, Italian, German, Spanish, Brazilian Portuguese, Russian, Dutch, Swedish, Danish, Finnish, Norwegian, Greek, Turkish, Polish, Czech, Hungarian, Romanian, Catalan, Ukrainian, Croatian		

Xerox® VersaLink® C7020/C7025/C7030 Colour Multifunction Printer

Device Specifications	VersaLink C7020	VersaLink C7025	VersaLink C7030	
Electrical Requirements				
North America	Voltage: 110-127V -10% / +6% Frequency: 50/60 Hz +/-3%, 12A			
Europe and Other Geographies	Voltage: 220-240V +/- 10% Frequency: 50 Hz +/-3%, 8A			
Power Consumption				
Printing ⁵	For 110V: 20 ppm = 0.9 kWh; 25 ppm = 1.1 kWh; 30 ppm = 1.5 kWh For 220V: 20 ppm = 0.9 kWh; 25 ppm = 1.1 kWh; 30 ppm = 1.5 kWh			
Standby Mode ⁵	110V: 80 Watts or less 220V: 80 Watts or less	110V: 80 Watts or less 220V: 80 Watts or less	110V: 94 Watts or less 220V: 94 Watts or less	
Sleep Mode ⁵	110V: 1.0 watts or less 220V: 1.4 watts or less			
Operating Environment				
Required Temperature Range (Storage)	32° to 95° F (0° to 35° C)			
Required Temperature Range (Operating)	50 to 90° F (10 to 32° C)			
Required Relative Humidity	10% to 85%			
Sound Power Levels	Printing: 6.70 B(A) or less <ul style="list-style-type: none"> 20 ppm = 6.45 B(A); 25 ppm = 6.50 B(A); 30 ppm = 6.70 B(A) Standby: 4.10 B(A) or less <ul style="list-style-type: none"> 20 ppm = 4.10 B(A); 25 ppm = 4.10 B(A); 30 ppm = 4.10 B(A) Full System (including finisher and HCF) Printing: 20 ppm = 7.07 B(A); 25 ppm = 7.22 B(A); 30 ppm = 7.37 B(A) Standby: 20 ppm = 4.10 B(A); 25 ppm = 4.10 B(A); 30 ppm = 4.10 B(A)			
Sound Pressure Levels	Printing: 52.0 dB(A) <ul style="list-style-type: none"> 20 ppm = 49.5 dB(A); 25 ppm = 50.0 dB(A); 30 ppm = 52.0 dB(A) Standby: 26.0 dB(A) <ul style="list-style-type: none"> 20 ppm = 26.0 dB(A); 25 ppm = 26.0 dB(A); 30 ppm = 26.0 dB(A) Full System (including finisher and HCF) Printing: 20 ppm = 55.5 dB(A); 25 ppm = 57.0 dB(A); 30 ppm = 58.5 dB(A) Standby: 20 ppm = 26.0 dB(A); 25 ppm = 26.0 dB(A); 30 ppm = 26.0 dB(A)			
Boot Time (from Off to UI Ready)	As fast as 98 seconds			
Warm-up Time (from Sleep to UI Ready)	As fast as 12 seconds			
Dimensions and Weight (Unpackaged)	Width	Depth	Height	Weight
Base Unit	23.23 in. / 590 mm	26.41 in. / 670.8 mm	30.23 in. / 767.9 mm	152.12 lbs. / 69.0 kg
Base Unit with Single Tray with Stand Module	24.24 in. / 615.7 mm	26.41 in. / 670.8 mm	44.04 in. / 1118.6 mm	203.49 lbs. / 92.3 kg
Base Unit with High Capacity Tandem Tray Module	24.24 in. / 615.7 mm	26.41 in. / 670.8 mm	44.04 in. / 1118.6 mm	234.79 lbs. / 106.5 kg
Base Unit with Three Tray Module	24.24 in. / 615.7 mm	26.41 in. / 670.8 mm	44.04 in. / 1118.6 mm	212.75 lbs. / 96.5 kg
Base Unit with Three Tray Module and Office Finisher LX (with Booklet Maker)	47.0 in. / 1194.0 mm	26.8 in. / 681.8 mm	44.04 in. / 1118.6 mm	296.3 lbs. / 134.4 kg
Certifications				
To view the latest list of certifications, go to www.xerox.com/OfficeCertifications .				

Xerox® VersaLink® C7020/C7025/C7030 Colour Multifunction Printer

Print	VersaLink C7020	VersaLink C7025	VersaLink C7030
First-print-out Time	As fast as 9.4 seconds Colour	As fast as 9.4 seconds Colour	As fast as 7.3 seconds Colour
	As fast as 7.2 seconds Black	As fast as 7.1 seconds Black	As fast as 5.6 seconds Black
Print Resolution	Up to 1200 x 2400 dpi		
Page Description Languages	PCL® 5e, 6 PDF XPS TIFF JPEG HP-GL Adobe® PostScript® 3™ (Optional)		
Maximum Print Area	4 mm from lead edge of paper, 2 mm from Side and Trail edges of paper		
Print Features	<ul style="list-style-type: none"> Application Defaults Banner Pages Enable / Disable Bi-directional Real-time Status Booklet Layout Color Correction Color Adjustments (lightness, contrast, saturation, color balance) Draft Mode Finishing (requires finishing) Fit to new paper size Job Identification (Print ID or Banner, Print ID in margins on first page only or all pages) Job Monitoring (Client or Local User Interface) LAN Fax (requires Fax Kit) N-up Page Layout (up to 16 pages per sheet) Paper Selection by Attribute Personal Print Print Around Enable / Disable Print from USB Sample Set Saved Job Scaling Secure Print Skip Blank Pages Special Pages (exception page programming: covers, inserts, exceptions pages) Store and Recall Driver Settings Stored Jobs Deletion Two-sided Printing (as default) Watermark (predefined and custom) Xerox® Earth Smart Driver Settings 		
Print from USB	<ul style="list-style-type: none"> Allows walk-up printing from Type A USB port Supports direct printing from computer via Type B USB port Supported file formats: PDF, JPEG, TIFF, XPS, PDF/A 		
Operating Systems	<ul style="list-style-type: none"> Windows® 7, 8, 8.1, 10 Windows Server 2008 SP2, Server 2008 R2 SP1, Server 2012, Server 2012 R2, Server 2016 macOS® 10.11, 10.12, 10.13 Citrix® Redhat® Enterprise Linux® Fedora Core IBM® AIX® HP-UX® Oracle® Solaris SUSE® SAP® <p>Note: For information about supported versions for the above operating systems, please visit our Drivers & Downloads page and specify your device at www.support.xerox.com.</p>		
Fonts	<ul style="list-style-type: none"> PostScript fonts: 136 PCL fonts: 83 		

Xerox® VersaLink® C7020/C7025/C7030 Colour Multifunction Printer

Xerox® Mobile Express Driver®	Makes it easy for mobile users to find, use and manage Xerox® and non-Xerox® devices in every new location. Plug into a new network, and Mobile Express Driver automatically discovers available printers and provides status and capability information. Save a list of “favorite” printers for each location, store application print settings for use on any printer in any network, and greatly reduce mobile support calls to IT.		
Xerox® Global Print Driver®	A truly universal print driver that lets IT administrators install, upgrade and manage Xerox® and non-Xerox® devices from a single driver. It provides a consistent, easy-to-use interface for end-users, reducing the number of support calls, and simplifying print services management.		
Xerox® Pull Print Driver	Makes it easy for IT managers to qualify, deploy and manage all print devices using a single driver in a Pull Print environment. Uses a single queue and single driver. The Xerox® Pull Print Driver extends convenience across a broad range of printing assets. IT administrators no longer need to manage and configure multiple drivers. Used in conjunction with Equitrac Office®, Ysoft® SafeQ®, Pharos® and others.		
Copy	VersaLink C7020	VersaLink C7025	VersaLink C7030
Document Scanner	110-sheet Duplex Automatic Document Feeder (DADF)		
Document Scanner Size	Platen: Up to 13.1 x 17.2 in. / 332.0 x 437 mm DADF: Up to 11.7 x 17 in. / 297 x 431.8 mm		
Simplex Copy Speed	Up to 20 cpm (copies per minute) 8.5 x 11 in. Up to 20 cpm A4 (210 x 297 mm)	Up to 25 cpm (copies per minute) 8.5 x 11 in. Up to 25 cpm A4 (210 x 297 mm)	Up to 30 cpm (copies per minute) 8.5 x 11 in. Up to 30 cpm A4 (210 x 297 mm)
Duplex Copy Speed	Up to 17 cpm (copies per minute) 8.5 x 11 in. Up to 17 cpm A4 (210 x 297 mm)	Up to 18 cpm (copies per minute) 8.5 x 11 in. Up to 18 cpm A4 (210 x 297 mm)	Up to 18 cpm (copies per minute) 8.5 x 11 in. Up to 18 cpm A4 (210 x 297 mm)
First-copy-out Time	As fast as 9.0 seconds Colour	As fast as 9.0 seconds Colour	As fast as 7.2 seconds Colour
	As fast as 6.9 seconds Black	As fast as 6.9 seconds Black	As fast as 5.8 seconds Black
Sides (input:output)	1:1, 1:2, 2:2 and 2:1		
Quantity	1 to 999		
Resolution (max.)	Up to 600 x 600 dpi		
Reduction / Enlargement	Variable zoom from 25 % to 400 % in 1 % increments		
Concurrency	Concurrent scanning and printing		
Copy Features	Annotation (Page Numbers, Comments, Date Stamp, Bates Stamping)* Auto-color Sensing Automatic Background Suppression Book Copying with Center Erase Booklet Copying* Collation Color Balance Color Effects Darkness Control Edge Erase Front Cover ID Card Copy Image Enhancement Lighten/Darken N-up Reduce / Enlarge 25 % to 400 % Image Shift Original Orientation Original Size Original Type Page Layout Sample Copy Saturation Sharpness *Requires HDD/Productivity Kit		

Xerox® VersaLink® C7020/C7025/C7030 Colour Multifunction Printer

Scan	
Capability	Black and white and colour scanning
Concurrency	Scan while the system is printing copy or network print jobs, or while it is transferring scan to network or fax jobs
Simplex Input Speed	Black and white: Scan up to 55 ipm – 8.5 x 11 in. / A4 (210 x 297 mm) Colour: Scan up to 55 ipm – 8.5 x 11 in. / 55 ipm A4 (210 x 297 mm)
Duplex Input Speed	Black and white: Scan up to 26 ipm – 8.5 x 11 in. / A4 (210 x 297 mm) Colour: Scan up to 26 ipm – 8.5 x 11 in. / 26 ipm A4 (210 x 297 mm)
Resolution	Optical – 600 x 600 dpi
Bit Depth	24-bit colour / 8-bit grayscale
Maximum Scan Area	Platen: Up to 13.1 x 17.2 in. / 332 x 437 mm Document Feeder: 11.7 x 17 in. / 297 x 431.8 mm
Network Filing Protocols	FTP SMTP SMB
File Formats	JPG TIFF (single and multi-page) XPS (single and multi-page) PDF (single and multi-page) Searchable PDF via Optical Character Recognition (OCR) Password-protected PDF Linearised PDF (set via embedded web server) and PDF/A
Scan Driver Compatibility (Network Only)	WIA TWAIN
Supported Scan Destinations	Scan to Home Scan to USB Scan to Email Scan to Network (Browse FTP or Browse SMB)
Network Scanning – Software Solutions	
Xerox® ConnectKey® Apps (Found at the Xerox® App Gallery)	Increase user productivity by simplifying and shortening everyday tasks. Unlike traditional software, ConnectKey Apps do not require a dedicated server, PC or IT resource. Instead, simply download these lightweight, serverless ConnectKey Apps to the ConnectKey-enabled multifunction printer.
PSTN One-line or Three-line Fax (Optional)	
Fax ³	
Fax Speed	33.6 Kbps
Resolution	Standard 200x100 dpi, Fine 200x200 dpi, Super Fine 300x300, 400x400, 600x600 dpi
Compression	MH, MR, MMR, JBIG
Fax Features	Walk-up Fax, includes LAN Fax, Direct Fax, Fax Forward to Email Fax dialing via Unified Address Book (up to 2,000 contacts)
Fax over IP (Optional)	
Compliance	T.38 compliant IP / SIP
Resolution	Standard 200x100 dpi, Fine 200x200 dpi, Super Fine 300x300, 400x400, 600x600 dpi
Compression	MH, MR, MMR, JBIG
Fax Features	Walk-up Fax, includes LAN Fax, Direct Fax, Fax Forward to Email Fax dialing via Unified Address Book (up to 2,000 contacts)

Xerox® VersaLink® C7020/C7025/C7030 Colour Multifunction Printer

Mobile Solutions and Mobile Device Apps	
Apple® AirPrint®	Print email, photos and important office documents directly from an Apple iPhone® or iPad® with no drivers to install and no cables to connect. With AirPrint, an iPhone or iPad automatically locates and connects to the AirPrint-enabled device over the office Wi-Fi network.
Google Cloud Print™	Google Cloud Print connects print devices to the web, enabling users to print the applications they use every day from smartphones, tablets, Chromebook™ notebook computers and any other web-connected device.
@PrintByXerox	@PrintByXerox is a free service that allows secure printing from any email-enabled device (computer, phone, tablet, iOS, Android™, Google® Chromebook™ and more) to a Xerox® printer or MFP using a single email address with no IT intervention. No training is needed. End-users simply send attachments to the email address, and release them at the MFP panel.
Xerox® Print Service Plug-in for Android™ (Free at Google Play™ Store)	The Xerox® Print Service Plug-in for Android KitKat (4.4 or greater) devices streamlines mobile printing without third-party apps or additional print drivers. You can easily print photos, Web pages and documents when your mobile device is connected to multifunction printers using a wireless network. A robust print option set includes two-sided printing, stapling and secure code release. A free download is available from the Google Play™ store.
Xerox® Mobile Link App (Free at Google Play™ Store and Apple® App Store)	The Xerox® Mobile Link App allows you to scan, email and fax from your phone or tablet by connecting with our multifunction printers and send data to and print data from cloud storage. It is easy to create Mobile Link One-Touch Workflows between a mobile device and a multifunction printer. Using a manual address or QR code identification for pairing, automatic device discovery makes it easy to find and pair a mobile device with a nearby Xerox® multifunction printer.
Xerox® Print Management and Mobility Suite, Xerox® Print Management and Mobility Service	Xerox® Print Management and Mobility Suite is a modular set of workflows designed to save customers time and money by providing effective control over their print fleet, while enabling worker productivity and mobility through a set of robust workflows. Xerox enables ultimate customer flexibility by offering these capabilities in both an on-premises server version and with a cloud based-version of this solution.
Security	
Security Features	<ul style="list-style-type: none"> Access Controls AES 256-bit Encryption Audit Log Certificate Path Validation Certificate Revocation List (CRL)/Status Protocol (OCSP) Detection of external program falsification (XCP Plug-in) Cisco® Identity Services Engine (ISE) Integration Domain Filtering FIPS 140-2 Firmware Verification Immediate Disk Overwrite* IP Address Filtering IPsec Network Authentication Port Filtering Pre-installed Self-Signed Certificates Role Based Permissions Secure Email Secure Fax Secure Print Security Certificate Management Smart Card Enablement (CAC/PIV/.NET) SNMPv3 Status Protocol (OCSP) TLS/SSL <p>*Requires HDD/Productivity Kit</p>

Xerox® VersaLink® C7020/C7025/C7030 Colour Multifunction Printer

Accounting	
Xerox® Standard Accounting (Standard)	
Tracking	Copy, Print, Fax, Scan and Email usage
Accounting	<p>Xerox® Standard Accounting Tool Up to 1,000 User Accounts without HDD Up to 9,999 User Accounts with HDD Up to 500 General accounts</p> <p>Network Accounting (Job Based Accounting) Up to 1,000 User IDs; Up to 1,000 Account IDs without HDD Up to 60,000 User IDs; Up to 60,000 Account IDs with HDD Up to 14,000 accounting records (transactions)</p>
Features	Administrator can manage the feature via the Embedded Web Server.
Accounting Options – Network Accounting Enablement (Standard) (Allows central server to manage all accounting)	
	<ul style="list-style-type: none"> Enhanced network accounting with up to the minute data on how the system is being used Comprehensive management and enterprise scale tracking and reporting of device usage of copy, print, scan and fax Numerous solutions are available through Xerox Alliance Partners. For details visit www.xerox.com Security enhancements include simultaneous support for HTTP/HTTPS protocols Device requests account authentication from third party server enabling larger databases of users and accounts <p>Accept Authentication Login at control panel and pass to third party Networking Account</p>
Paper Handling	
Document Feeder (Standard)	
Capacity⁴	Duplex Automatic Document Feeder (DADF): 110 sheets
Sizes One-sided: Two-sided:	Custom sizes: 4.92 x 3.35 in. to 11.69 x 17 in. / 125 x 85 mm to 297 x 431.8 mm 4.92 x 4.33 in. to 11.69 x 17 in. / 125 x 110 mm to 297 x 431.8 mm
Weights One-sided: Two-sided:	11 lb. bond to 34 lb. bond / 38 to 128 gsm 13 lb. bond to 34 lb. bond / 50 to 128 gsm
Bypass Tray (Standard)	
Capacity⁴	100 sheets
Sizes	Custom sizes: 3.5 x 3.87 in. to 11.69 x 17 in. / 88.9 x 98.4 mm to 297 x 431.8 mm
Weights One-sided: Two-sided:	16 lb. bond to 80 lb. cover / 60 to 216 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm
Types	Bond Plain Paper Cardstock Custom Envelopes Hole Punched Labels Heavyweight Labels Letterhead Lightweight Cardstock Lightweight Glossy Cardstock Lightweight Glossy Cardstock Reload Pre-Printed Recycled

Xerox® VersaLink® C7020/C7025/C7030 Colour Multifunction Printer

Tray 1 (Standard)	
Capacity⁴	520 sheets
Sizes	Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm
Weights One-sided: Two-sided:	16 lb. bond to 95 lb. cover / 60 to 256 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm
Types	Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Lightweight Glossy Cardstock Lightweight Glossy Cardstock Reload Heavyweight Cardstock Pre-Printed Recycled
Choose 1 of the 4 Additional Paper Handling Options:	
Option 1 – Single Tray (Tray 2) (Does not include stand)	
Capacity⁴	520 sheets
Sizes	Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm
Weights One-sided: Two-sided:	16 lb. bond to 95 lb. cover / 60 to 256 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm
Types	Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Lightweight Glossy Cardstock Lightweight Glossy Cardstock Reload Heavyweight Cardstock Pre-Printed Recycled
Option 2 – Single Tray Module (Tray 2) with Stand	
Capacity⁴	520 sheets
Sizes	Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm
Weights One-sided: Two-sided:	16 lb. bond to 95 lb. cover / 60 to 256 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm

Xerox® VersaLink® C7020/C7025/C7030 Colour Multifunction Printer

Types	<ul style="list-style-type: none"> Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Lightweight Glossy Cardstock Lightweight Glossy Cardstock Reload Heavyweight Cardstock Pre-Printed Recycled
Option 3 – Three Tray Stand Module (Optional)	
Capacity⁴	<ul style="list-style-type: none"> Tray 2: 520 sheets Tray 3: 520 sheets Tray 4: 520 sheets
Sizes	Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm
Weights One-sided: Two-sided:	<ul style="list-style-type: none"> 16 lb. bond to 95 lb. cover / 60 to 256 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm
Types	<ul style="list-style-type: none"> Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Lightweight Glossy Cardstock Lightweight Glossy Cardstock Reload Heavyweight Cardstock Pre-Printed Recycled
Option 4 – High Capacity Tandem Tray Stand Module (Optional)	
Capacity⁴	<ul style="list-style-type: none"> Tray 2: 520 sheets Tray 3: 870 sheets Tray 4: 1,130 sheets
Sizes	<ul style="list-style-type: none"> Tray 2: Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm Tray 3: Standard Sizes: 8.5 x 11 in. and 7.25 x 10.5 in. / A4 or B5 Tray 4: Standard Sizes: 8.5 x 11 in. and 7.25 x 10.5 in. / A4 or B5
Weights One-sided: Two-sided:	<ul style="list-style-type: none"> 16 lb. bond to 95 lb. cover / 60 to 256 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm
Types	<ul style="list-style-type: none"> Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Lightweight Glossy Cardstock Lightweight Glossy Cardstock Reload Heavyweight Cardstock Pre-Printed Recycled

Xerox® VersaLink® C7020/C7025/C7030 Colour Multifunction Printer

Envelope Tray – Replaces Tray 1 (Optional)	
Capacity⁴	Up to 60 envelopes
Sizes	#10 commercial, Monarch, DL, C5 Custom sizes: 3.9 x 5.8 in. to 6.4 x 9.5 in. / 98 x 148 mm to 162 x 241 mm
Weights	20 lb. bond to 25 lb. bond / 75 to 90 gsm
High Capacity Feeder (Optional – requires either one of options 2, 3 or 4 above)	
Capacity⁴	2,000 sheets
Sizes	Standard Sizes: 8.5 x 11 in. and 7.25 x 10.5 in. / A4 or B5
Weights One-sided: Two-sided:	16 lb. bond to 80 lb. cover / 60 to 216 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm
Total Capacity	
Base Unit Capacity⁴	620 sheets
Single Tray Module Capacity⁴	1,140 sheets
Single Tray Module with Stand Capacity⁴	1,140 sheets (3,140 sheets with optional High Capacity Feeder)
Three Tray Module Capacity⁴	2,180 sheets (4,180 sheets with optional High Capacity Feeder)
High-Capacity Tandem Tray Capacity⁴	3,140 sheets (5,140 sheets with optional High Capacity Feeder)
Finishing	
Centre Output Tray (Optional – not compatible with other Finishing options)	
Dual Catch Trays⁴	250 sheets each; Lower tray offsets
Integrated Office Finisher (Optional)	
Stacking Tray	500 sheets of 20 lb. bond / 80 gsm – 8.5 x 11 in. / A4 or 250 sheets of 20 lb. bond / 80 gsm – 11 x 17 in. / A3
Sizes	3.5 x 3.9 in. to 11.7 x 17 in. / 89 x 98 mm to 297 x 432 mm
Weights	16 lb. bond to 80 lb. cover / 60 to 220 gsm
Stapling	Single Auto stapling: 50 sheets maximum: Letter / A4 / B5-size sheets (less than 90 gsm or (2) 220 gsm covers) 30 sheets maximum: Legal / Tabloid / A3 / B4-size sheets (less than 90 gsm or (2) 220 gsm covers)
Office Finisher LX (Optional) (Requires one of the above paper handling options 2, 3 or 4)	
Capacity⁴	Stacking Tray: 2,000 sheets unstapled or 1,000 sheets single stapled or 750 sheets dual stapled (8.5 x 11 in. / A4) (dual stapling only with optional booklet maker)
Sizes	8.3 x 7.2 in. to 11.7 x 17 in. / 210 x 182 mm to 297 x 432 mm
Weights	16 lb. bond to 80 lb. cover / 60 to 220 gsm
Multiposition Stapling	50 sheets of 24 lb. bond / 90 gsm
Hole Punch (Optional) North America: Europe:	2-3 Hole Punch 2-4 Hole Punch
Booklet Maker for Office Finisher LX (Score/Crease, Saddle-stitch Staple) (Optional) (Requires one of the above paper handling options 2, 3 or 4)	
Capacity⁴	40 booklets (2-15 sheets per booklet – 20 lb. / 80 gsm or less)
Sizes	Letter – 8.5 x 11 in. / A4 SEF Legal – 8.5 x 14 in. / B4 SEF Ledger – 11 x 17 in. / A3 SEF
Saddle-stitch Stapling	2-15 sheets / 8-60 page booklet 16 lb. bond to 24 lb. bond / 60 to 90 gsm
Score / Crease	1-15 sheets / unstapled

Xerox® VersaLink® C7020/C7025/C7030 Colour Multifunction Printer

Convenience Stapler (Optional – Requires Work Surface)	
Capacity ⁴	50-sheet stapling 5,000 staples Requires a separate outlet
Device Management	
Network Protocols	TCP/IP: HTTP/HTTPS, Internet Printing Protocol, LPR/LPD, Raw Socket Printing/Port 9100, IPv4/IPv6, WSD LDAP Bonjour® / AirPrint™ FTP Most protocols not in use can be disabled
Administrative Protocols	DHCP, SNMP, WINS, HTTP, HTTPS, TLS, SNTP, MDNS
Xerox® CentreWare® Web	
	<ul style="list-style-type: none"> • A Web-based server application for network administrators that permits web browser-based device management from any workstation, whether running Windows or UNIX or any other operating system • Works with any SNMP-managed printer from any manufacturer • Provides help with device discovery and installations, health checks and troubleshooting, and device upgrades, as well as basic accounting and asset management
Embedded Web Server – Integrated Device Web Page	
Device Status	<ul style="list-style-type: none"> • Tray status/contents • Consumables status • Billing/Usage • Quick Links • Online Support
Print Queue Viewing	Job print queue management—view and delete
Job Submission	Print-ready files (PS (with optional PostScript option), PCL, PDF, XPS, JPEG)
Device Administration	Allows simple, remote installation setting of configuration options and management of the device
Browsers	Microsoft® Internet Explorer® Microsoft Edge™ Mozilla™ Firefox® Apple® Safari® Google Chrome™
Remote Services	
Xerox® Meter Assistant® Service	Automates the process of collecting and submitting meter reads for tracking and billing of Xerox® device usage. Eliminates the need for time-consuming end-user involvement and ensures that meter reads are submitted to Xerox on time.
Xerox® Supplies Assistant® Service	Automatically orders supplies for Xerox® output devices based on actual usage, eliminating the need to manually manage supplies inventory.
MaintenanceAssistant	Offers a fast (and free) way to resolve potential issues and receive assistance and automate the troubleshooting/repair process. Diagnostic data is sent to Xerox, allowing for problems to be solved faster with increased uptime.

Xerox® VersaLink® C7020/C7025/C7030 Colour Multifunction Printer

Supplies and Accessories	Quantity	Part Number
Supplies		
High Capacity Print Cartridges	Cyan: 9,800 standard pages ⁶ Magenta: 9,800 standard pages ⁶ Yellow: 9,800 standard pages ⁶ Black: 16,100 standard pages ⁶	106R03752 106R03751 106R03750 106R03749
Extra High Capacity Print Cartridges	Cyan: 16,500 standard pages ⁶ Magenta: 16,500 standard pages ⁶ Yellow: 16,500 standard pages ⁶ Black: 23,600 standard pages ⁶	106R03748 106R03747 106R03746 106R03745
Metered Print Cartridges	Cyan: 15,000 standard pages ⁷ Magenta: 15,000 standard pages ⁷ Yellow: 15,000 standard pages ⁷ Black: 22,000 standard pages ⁷	106R03736 106R03735 106R03734 106R03733
Drum Cartridge	Black: 109,000 ⁸ Cyan, Magenta, Yellow : 87,000 standard pages ⁸	113R00780
Waste Toner Bottle	30,000	115R00128
LX Booklet Maker Cartridge (8 cartridges per container)	16,000 staples (2,000 each cartridge)	008R12897
Staple Refills for Finishers (3 refills per container)	15,000 staples (5,000 each refill)	008R12941
Staple Cartridge for Finishers (1 cartridge per container)	5,000 staples (5,000 each cartridge)	008R12964

Xerox® VersaLink® C7020/C7025/C7030 Colour Multifunction Printer

Accessories / Options	
Single Tray Module	097S04910
Single Tray with Stand Module	097S04907
Three Tray Stand Module	097S04908
High-Capacity Tandem Tray Stand Module	097S04909
Envelope Tray (Replaces Tray 1)	497K17720
Centre Output Tray (Dual Catch Tray)	497K17800
HDD (320 GB hard drive)	497K17740
1 Line Fax Kit (PSTN Fax)	497K17770
1 Line Fax Kit (PSTN Fax) (Brazil and Argentina)	497K17790
3 Line Fax Kit (PSTN Fax)	497K17780
Wireless Network Adapter Kit	497K16750
Internal Card Reader / RFID Kit	497K18140
PostScript Kit	497K18340
Fax Over IP Kit	497K18330

¹ Maximum volume capacity expected in any one month. Not expected to be sustained on a regular basis.

² Expected regular monthly throughput.

³ Requires analogue phone line.

⁴ Paper capacities are based on 20 lb. / 75 gsm stock; capacities will vary with different weight stocks.

⁵ Power states defined per ENERGY STAR® Programme requirements for Imaging Equipment.

⁶ Average standard pages. Declared Yield in accordance with ISO/IEC 19798. Yield will vary based on image, area coverage and print mode.

⁷ Assumptions: Toner cartridge yield is based on 5% area coverage on 8.5 x 11 in. / A4 LEF. Toner yield can vary due to many factors, including but not limited to, image area coverage, image content, media size, run mode, application types, monthly print volumes and image quality set-points.

⁸ Approximate pages. Declared yield will vary depending on job run length, media size/orientation and machine speed. For more information visit: <http://www.office.xerox.com/latest/SUPGL-01.pdf>

Return spent imaging supplies through the Xerox Green World Alliance collection/reuse/recycling programme. For more information, visit www.xerox.com/about-xerox/recycling.

For more information, visit us at www.xerox.com/office

Configurations vary by geography.

